

HD-831/831C

3-WAY HDMI SELECTOR

INSTRUCTION MANUAL

INTRODUCTION

WELCOME

Thank you for purchasing the HDMI Selector. Please read the following instruction carefully before attempting to use this product.

Please keep these instructions for future reference.

WARNINGS

-Always remove mains plug from the wall outlet before any service operation or when not in use for long period.

-To prevent fire or shock hazard, do not expose this appliance to dropping or heavy knocking. No objects filled with liquids, such as vases, should be placed on the apparatus.

PRODUCT FEATURES

Product Feature

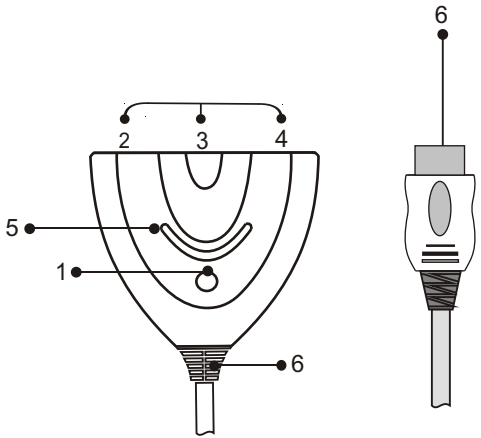

1. **Select button -** To change the inputs source. (If 2 or more devices are power on)

2. **HDMI Input 1 -** For connection to HDMI source.

3. **HDMI Input 2 -** For connection to HDMI source.

4. **HDMI Input 3 -** For connection to HDMI source.

5. **LED Indicator -** To indicator the input selected.

6. **HDMI Output -** For connection to HDMI TV/Monitor (Build-in cable only availible On HD-831)

Note: 1. To prevent any possible problems, always disconnect the power plug or switch Off the POWER button of the Source units before connecting or disconnecting the cables.

2. When connecting the cables, always insert the pin plugs correctly into the connecting jacks.

OPERATION

Connection and Operation

1. The Selector has been designed to connect up to 3 separate HDMI devices and directly output the HDMI plug onto HDTV.
2. Once a device has been connected, there is no need to remove any of the cables when selecting an input.

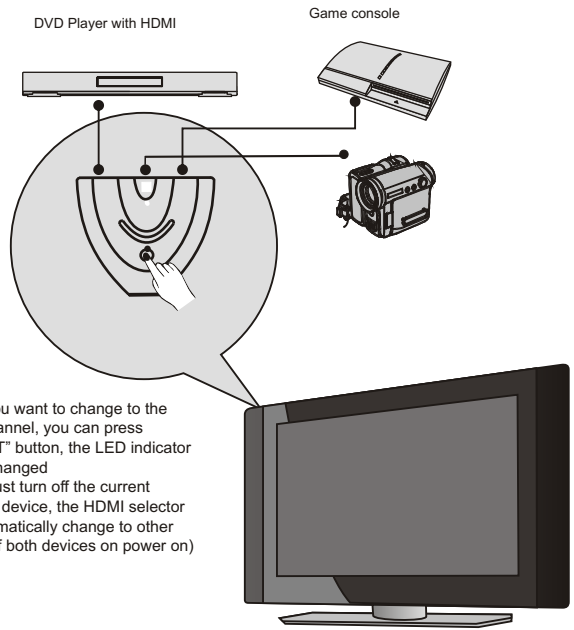

3. When you want to change to the other channel, you can press "SELECT" button, the LED indicator will be changed
4. Or you just turn off the current selected device, the HDMI selector will automatically change to other device (if both devices on power on)

Important: *If connects or power on only 1 device, the "SELECT" button is does not work.*

Note: *The above devices connection are for reference only.Any suitable devices may be connected to the Input Channels.*

SPECIFICATIONS

- 3 x HDMI inputs (DVI compatible)
- HDMI (V1.3 with deep color)
- 720i, 720p, 1080i and 1080p resolutions
- HDCP Complaint
- Data rate: 10.2 Gbps
- Bandwidth 4.0 Gpbs/400MHz
- Single link range: 4.5 Gbps
- Input video singal: 0.5 - 1.0 V p-p
- Input DDC singal: 5 V p-p (TTL)

Design and specifications are subject to change without notice

TROUBLESHOOTING

No Picture

1. All equipment must be connected when the power is off. Switch off the power to all equipment and reconnect.
2. Check to ensure all cables have been connected firmly between the HDMI Selector AND your equipment.
3. Check to ensure that the correct input channel has been selected on the HDMI Selector.
4. Check that the television is set to the HDMI channel.
5. Ensure all equipment has been switched on.

No Sound

1. Check to ensure all cables have been connected firmly between the HDMI Selector AND your equipment.